

EVOHEAT



COMMERCIAL

EVO315-C

315L COMMERCIAL
HOT WATER HEAT PUMP

AUSTRALIA'S FAVOURITE WATER HEATER **EVOHEAT**

HOT WATER YOU CAN RELY ON

Like most other appliances, an increased focus on energy efficiency over the past 20 years has led to significant advancements in hot water systems. So don't just replace it with what you've always had – **REPLACE IT WITH SOMETHING BETTER!**

THE EVO 315-C

The Evo315-C is the next evolution in water heating, with advanced energy efficiency technologies and built in smart features to ensure you're provided with clean, safe, and economical hot water all year round.

Specifically designed for simple replacement of existing 315/400L triple element electric boilers; the Evo315-C utilises the same compact footprint, requires no additional plumbing or electric modifications, and is capable of producing a whopping 10.8kW of heat - using just a fraction of the comparable energy.

**Cut your energy consumption by more than 50%,
without sacrificing performance!**

IDEAL FOR COMMERCIAL APPLICATIONS

Compact in size, yet powerful enough to supply 315 liters of hot water, the Evo 315-C is ideal for commercial applications such as resorts, hotels and motels, restaurants and retail outlets.




**A HEAT PUMP
EXTRACTS ENERGY
FROM THE
SURROUNDING AIR**

INSTALL NOW & SAVE

Not only will it save you on electricity - the Evo315-C is also registered with the Australian Federal Government Clean Energy Regulator as an energy efficient water heater. Once installed, you could also be eligible to receive up to \$2,550* towards the costs of your system!

| Climate Zone | Certificates (STCS) |
|--------------|---------------------|
| ZONE 1 | 17 STCS |
| ZONE 2 | 16 STCS |
| ZONE 3 | 21 STCS |
| ZONE 4 | 22 STCS |
| ZONE 5 | 21 STCS |

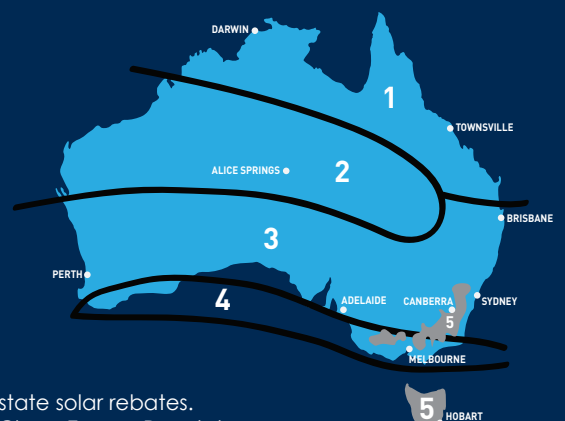

*Actual amounts will vary and will depend on Federal & State Government and state solar rebates.

*All STC ratings revised 1/1/2024 due to the reduced deeming period as per the Clean Energy Regulator.

HIGH PERFORMANCE & FAST RECOVERY

Designed with the latest heat pump technology and additional element boost, the Evo315-C ensures high performance and fast recovery every time!

SIMPLE & COST EFFECTIVE UPGRADE


The Evo315-C is a stylish compact all in one system. There are no roof panels, no additional components to assemble on site, and no extra parts or pipes required. This results in a simple and cost-effective upgrade when installed to the same location as your existing water heater.




Vacation mode



Quiet operation



Intelligent control with built-in timers




Hydro-power booster up to 225Lof hot water p/hr




Simple operation




Auto Defrost



LCD touch screen controller



Blue Diamond enamel coated steel tank



Reliable, stable hot water, independent of the weather



Horizontal airflow



Stable performance from -5°C



Easy installation & compact footprint



Extremely energy efficient



Ideal to work with solar PV



EvoHeat has been awarded the Hot Water Product Review Award for the last consecutive six years. The Evo270-1 continues to be recognised by Australian consumers for its advanced energy efficiencies and smart features. ProductReview.com.au is one of the most trusted online review sites for Australian consumers seeking real options and reviews. Their annual awards highlight products and services that have been recognised as the best and most reliable purchasing choice available to Australian consumers.

AUSTRALIA'S FAVOURITE WATER HEATER 



Evo315-C warranty

For further peace of mind the Evo315-C comes with an industry leading warranty:

**TANK
WARRANTY**

**5
YEARS**

**COMPRESSOR & PARTS
WARRANTY**

**2
YEARS**

Evo315-C Hot Water Heat Pump Specifications

| | |
|---|---------------|
| Storage Capacity | 315L |
| Max Temperature Setting | 60°C |
| Power Input | 1.46kW |
| Heating Output | 6kW |
| Noise Rating | 52dB(A) |
| Running Current | 6.08 Amps |
| Power Supply | 240V/1/50Hz |
| Water Inlet/Outlet Size | 20mm (3/4") |
| Auxiliary Heating | 4.8kW |
| Recommended circuit Heat pump: | 20amps |
| Recommended Circuit Auxiliary E-Heater | 20amps |
| Operating Temperature Range | -5°C to 43°C |
| Net Weight | 157kg |
| Hot Water Recovery | 126 L/hr |
| With Hydro Boost | 225 L/hr |
| Dimensions (mm) | H:2250 D: 640 |
| Net Weight | 157kg |

*Performance rated at: 20°C ambient air, 20°C water inlet, and 60°C hot water outlet *Refer to website for dimensions and inlet/outlet locations. Product specification information provided above is correct at the date of printing, this data may change without notice. Please speak with an EvoHeat Specialist for the most current product specification

Updated 03.01.2024



EvoHeat Hot Water Pty Ltd

P: 1300 859 933 | E: info@evoheat.com.au | W: evoheat.com.au

AUSTRALIA'S FAVOURITE WATER HEATER **EVOHEAT**